MMinimax



HYDRANTS, HOSE BOX & HOSE REEL DRUM

Single Headed Hydrant Valve

Specifications:	
Туре	Single Headed Oblique
Size	Inlet of 80 mm & Outlet of 63mm
Design Std	IS: 5290 Type A
Operation	Hand Wheel
Approval	ISI marked





Double Headed Hydrant Valve

Specifications:	
Туре	Double Headed Oblique
Size	Inlet of 100 mm & Outlet of 63mm
Design Std	IS: 5290 Type B
Operation	Hand Wheel
Approval	ISI marked

Available in Gun Metal, Stainless Steel and Aluminium variants



Hose Box

Specifications:			
Туре		Double Door	
Dimensions		750 x 600 x 250 mm	
Body & Door	14 SWG	16SWG	18SWG
Glass		Transparent Acrylic - 3 mm	thick
Lock		Common key lock	
Finish	Coats of PO	Red paint from outside & whi	ite paint from inside
Accommodation	2 length o	f 15 mtr. Hoses & 1 no. branch	Pipe with Nozzle



Hose Reel Drum


Specifications:	
Туре	Swinging Type A 180 deg. wall mounted
Range of jet	Min. 6.0 mtrs at 7.0 bar inlet pressure
Nozzle	Gun Metal/ ABS plastic
Hose Length	30 mtrs.
Hose Diameter	20 mm Dia
Operating pressure	10 kg/cm2



BRANCH PIPE & HOSE COUPLING

Branch Pipe

Specifications:	
Туре	Short branch pipe with 20 mm dia nozzle
Design Std	IS: 903
Size	63mm dia inlet & 20mm dia outlet
Body	GM /SS/AI
Nozzle	GM /SS/AI
Hydrostatic Test Pressure	21 kgf/cm²
Approval	ISI Marked

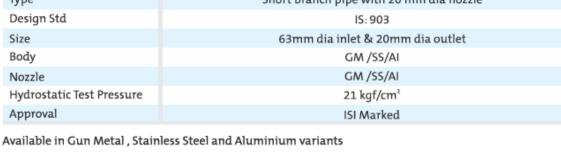



Fire Hose & Coupling

Specifications:	
Туре	Fire Hose A / B & CP Hose
Design Std	IS: 636 & IS : 8423
Size	63mm
Length	7.5/15/30 mtr
Working pressure	14 kgf/cm²
Brust pressure	35.7 kgf/cm ²
Proof pressure	21.4 kgf/cm²





Are suitable for : Commercial & Residential Building

Available Variants: • Fire Hose Type A (GM/SS/AI Couplings), • Fire Hose Type B (GM/SS/AI Couplings) • CP Hose (GM/SS/AI Couplings)

Delivery Hose Coupling

Specifications:	
Туре	Instantaneous
Design Std	IS: 903
Size	63mm dia (Nominal Diameter)
Body	GM/SS/AI
Approval	ISI Marked
	Tayl (Tilgal Insura)



FIRE BLANKET, ESCAPE LADDER & FIREMAN AXE

Fire Blanket

Specifications:	
Size	1.2 x 1.2 metrs, 1.2 x 1.8 mtrs & 1.8 x 1.8 mtrs
Material	Specially treated fiberglass satin texture
Ideal Usage	Kitchens, Hotels, Gas stations, Shipbuilding & Petrochemical Industry,
	Shopping Malls, Supermarkets, Frame & repair work.



Fire Escape Ladder

Specifications:	
Size	4.5 M, 7.5M and 10.5M
Material	Steel pipe of hook with high strength Extrusion Aluminum alloy beam & high density woven belt
Ideal Usage	Homes, Kitchens, Hotels, Gas stations, Shopping Malls, Supermarkets



Fireman AXE

Specifications:	
Size & Dimensions	As per IS:926 - 1985
Standard Reference	Traceable to IS:926 -1985
Axe Head	Steel - As per IS: 1977 -1975
Handle	Vulcanized Rubber













